


Datasheet revision 1.1 www.chipquik.com

Conductive Paint 30g Jar - Low Resistance



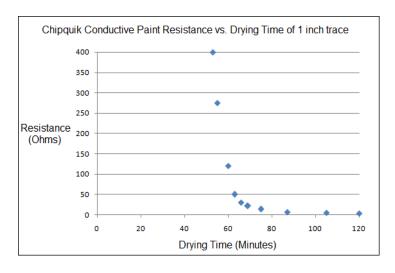

Product Highlights

Low Resistance Dries at room temperature RoHS II and REACH compliant

Specifications

Resistance: Approximately 1.0 Ohms/Square at 0.004" stencil thickness

Packaging: 30g Jar Shelf Life: >12 months

Drying Time: Allow 60-120 minutes for paint to dry before using circuit. Resistance will drop from a few

Mega Ohms at 0 minutes to approximately 3 ohms per inch of trace after 120 minutes.

Application

Apply by dot dispensing, line dispensing, stencil and squeegee, or with paint brush.

Cleaning

Clean using water or isopropyl alcohol (IPA).

Storage and Handling

Store at 3-25°C (37-77°F). Do not freeze.

Transportation

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.